

### Quality, Elegance and Efficiency

The H Series ceiling fan from Haiku represents our foremost achievement in design, craftsmanship and technological capability. Built from premium materials like aircraft-grade aluminum and sustainable Moso bamboo, H Series offers an exceptional number of customizable options. Onboard SenseME™ Technology allows for automated fan operation,

tailoring it to fit your unique comfort needs and minimizing energy use year-round. H Series holds top rankings from ENERGY STAR\* and is capable of connecting with other smart technologies to significantly reduce the workload of heating and cooling systems.

#### SenseME Technology Features



#### **Motion Sensor**

Detects when you enter or leave a room, turning the fan and LED light on and off automatically



#### Whoosh Mode

Silently varies fan speed to mimic cooling natural breezes



### Smart Mode

Alternates between seasonal settings—Smarter Heating and Smarter Cooling—to maintain comfort and maximize energy savings



#### Sleep Mode

Responds to changing conditions to provide customized comfort all night long



#### Scheduling

Sets precise schedules for fan control modes




#### Wi-Fi

Connects to the Haiku Home mobile app for fan control and over-the-air updates



Tel: +65 6848 8500 / 6848 4747 Email: enquiry@haiku.com.sg



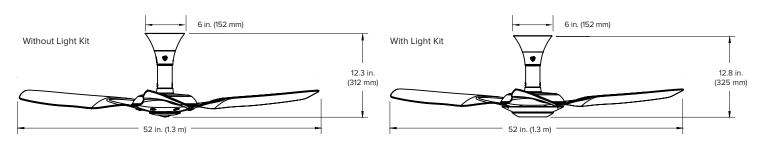

echnical Specifications			
Model	H Series Bamboo Low Profile Mount		
Model number <sup>1</sup>	S312	27-S0-XX-XX-02-C-01	
Fan diameter		52 in. (1.3 m)	
Fan height without light		12.3 in. (312 mm)	
Fan height with light		12.8 in. (325 mm)	
Hanging weight <sup>2</sup>		14 lb (6.4 kg)	
Motor and assembly finishes	· · · · · · · · · · · · · · · · · · ·	ack, satin nickel, oil-rubbed bronze satin nickel, oil-rubbed bronze	
Airfoil material		Bamboo	
Airfoil finishes	Caramel or Cocoa		
Number of airfoils	3		
Motor type	EC motor with digital inverter drive		
Fan speeds	7		
Operating voltage and frequency	100–125 VAC, 1 Ф, 50–60 Hz 200–240 VAC, 1 Ф, 50–60 Hz		
IP rating	X2		
RPM (min/max)	49/178 RPM		
Amps (min/max)	0.039/0.24 A		
Watts (min/max)		1.49/14.81 W	
Controller <sup>3</sup>	Haiku Home a	pp; handheld remote supplied	
Optional light kit	16 dimmable light settings		
Operational temperature range	32 to 104° F (0 to 40° C)		
Environment	F	or indoor use only	
Wassanta (Danisla sati 194	Motor	Limited lifetime in the US and Canada	
Warranty (Residential)⁴	All other components	1 year in the US and Canada	
	Motor	2 years in the US and Canada	
Warranty (Commercial)⁴	All other components	1 year in the US and Canada	

### XX-XX indicates placeholder numbers, which vary depending on finish options, where the fan is installed, and other factors. The actual, precise fan weight will vary based on individual component weights and finishing.

#### **Accessories**

#### **Handheld Remote**

#### **Optional Haiku Wall Control**






#### **Optional Light Kit**



#### **Airfoil Finishes**







Caramel Bamboo Cocoa Bamboo

Sensors	
Environmental sensors	Ambient temperature, surface temperature and relative humidity
Motion	Passive infrared
Communication radio	Embedded Wi-Fi chip













SenseME Technology is supported by Android™ and iOS®. All specifications are subject to change without notice.

<sup>&</sup>lt;sup>4</sup> Warranties vary by country. See full warranty for details.

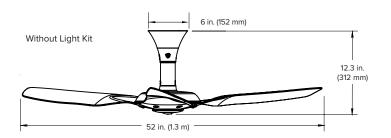

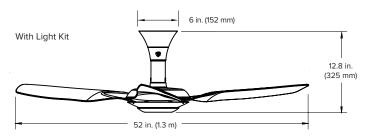

Technical Specifications			
Model	H Series Aluminum Low Profile Mount		
Model number <sup>1</sup>	S3127-S0-XX-XX-02-C-01-F421		
Fan diameter		52 in. (1.3 m)	
Fan height without light		12.3 in. (312 mm)	
Fan height with light		12.8 in. (325 mm)	
Hanging weight <sup>2</sup>		16.5 lb (7.5 kg)	
Motor and assembly finishes		Black or white	
Airfoil material		Aluminum	
Airfoil finishes	Р	Polished aluminum	
Number of airfoils	3		
Motor type	EC motor with digital inverter drive		
Fan speeds	7		
Operating voltage and	100–125 VAC, 1 Ф, 50–60 Hz		
frequency	200–240 VAC, 1 Φ, 50–60 Hz		
IP rating	X2		
RPM (min/max)	49/178 RPM		
Amps (min/max)	0.039/0.24 A		
Watts (min/max)	2.21/14.81 W		
Controller <sup>3</sup>	Haiku Home app; handheld remote supplied		
Optional light kit	16 dimmable light settings		
Operational temperature range	32° to 104° F (0° to 40° C)		
Environment⁴	For indoo	or or covered outdoor use	
Warranty (Residential)⁵	Motor	Limited lifetime in the US and Canada	
warranty (Residential)	All other components	1 year in the US and Canada	
Mayramb (Campagas'-115	Motor	2 years in the US and Canada	
Warranty (Commercial)⁵	All other components	1 year in the US and Canada	

#### XX-XX indicates placeholder numbers, which vary depending on finish options, where the fan is installed, and other factors.

#### **Accessories**

#### **Handheld Remote Optional Haiku Wall Control**





#### **Optional Light Kit**



#### Airfoil Finish



Polished Aluminum

Sensors	
Environmental sensors	Ambient temperature, surface temperature and relative humidity
Motion	Passive infrared
Communication radio	Embedded Wi-Fi chip













<sup>&</sup>lt;sup>2</sup> The actual, precise fan weight will vary based on individual component weights and finishing.
<sup>3</sup> SenseME Technology is supported by Android<sup>18</sup> and iOS<sup>5</sup>. All specifications are subject to change without notice.

Certified by Intertek/ETL to UL 507 damp rated applications

Warranties vary by country. See full warranty for details.

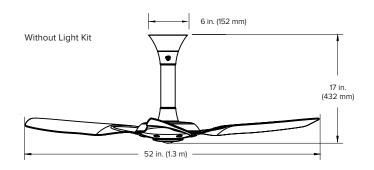

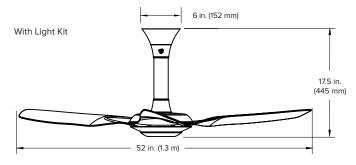

Technical Specifications			
Model	H Series Bamboo Standard Mount		
Model number <sup>1</sup>	S3127-A2-XX-XX-02-C-01		
Fan diameter		52 in. (1.3 m)	
Fan height without light		17 in. (432 mm)	
Fan height with light		17.5 in. (445 mm)	
Hanging weight <sup>2</sup>		14 lb (6 kg)	
Motor and assembly finishes	,	ack, satin nickel, oil-rubbed bronze satin nickel, oil-rubbed bronze	
Airfoil material		Bamboo	
Airfoil finishes		Caramel or Cocoa	
Number of airfoils	3		
Motor type	EC motor with digital inverter drive		
Fan speeds	7		
Operating voltage and	100–125 VAC, 1 Ф, 50–60 Hz		
frequency	200–240 VAC, 1 Φ, 50–60 Hz		
IP rating	X2		
RPM (min/max)	49/201 RPM		
Amps (min/max)	0.0471/0.1827 A		
Watts (min/max)		2.29/21.33 W	
Controller <sup>3</sup>	Haiku Home app; handheld remote supplied		
Optional light kit	16 dimmable light settings		
Operational temperature range	32° to 104° F (0° to 40° C)		
Environment	For indoor use only		
Morrowty /Decidenti-154	Motor	Limited lifetime in the US and Canada	
Warranty (Residential)⁴	Motor  All other components	Limited lifetime in the US and Canada  1 year in the US and Canada	
Warranty (Residential)⁴  Warranty (Commercial)⁴			

### <sup>1</sup> XX-XX indicates placeholder numbers, which vary depending on finish options, where the fan is installed, and other factors. <sup>2</sup> The actual, precise fan weight will vary based on individual component weights and finishing.

#### **Accessories**

#### **Handheld Remote**

#### **Optional Haiku Wall Control**






#### **Optional Light Kit**



#### **Airfoil Finishes**





Caramel Bamboo

Cocoa Bamboo

Sensors	
Environmental sensors	Ambient temperature, surface temperature and relative humidity
Motion	Passive infrared
Communication radio	Embedded Wi-Fi chip













<sup>&</sup>lt;sup>3</sup> SenseME Technology is supported by Android™ and iOS°. All specifications are subject to change without notice.

<sup>&</sup>lt;sup>4</sup> Warranties vary by country. See full warranty for details.

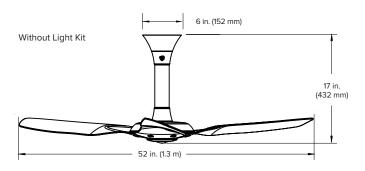

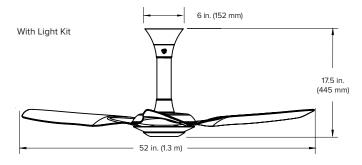

Technical Specifications			
Model <sup>1</sup>	H Series Aluminum Standard Mount		
Model number	S3127-	A2-XX-XX-02-01-C-F421	
Fan diameter		52 in. (1.3 m)	
Fan height without light		17 in. (432 mm)	
Fan height with light		17.5 in. (445 mm)	
Hanging weight <sup>2</sup>		16.5 lb (7.5 kg)	
Motor and assembly finishes		Black or white	
Airfoil material		Aluminum	
Airfoil finishes	Polished aluminum		
Number of airfoils	3		
Motor type	EC motor with digital inverter drive		
Fan speeds	7		
Operating voltage and	100–125 VAC, 1 Ф, 50–60 Hz		
frequency	200–240 VAC, 1 Φ, 50–60 Hz		
IP rating	X2		
RPM (min/max)	49/202 RPM		
Amps (min/max)	0.04/0.16 A		
Watts (min/max)	2.27/18.14 W		
Controller <sup>3</sup>	Haiku Home app; handheld remote supplied		
Optional light kit	16 dimmable light settings		
Operational temperature range	32° to 104° F (0° to 40° C)		
Environment⁴	For indoo	or or covered outdoor use	
Maryanti (Dasidanti - 115	Motor	Limited lifetime in the US and Canada	
Warranty (Residential)⁵	All other components	1 year in the US and Canada	
Marranti (Commons!-1)5	Motor	2 years in the US and Canada	
Warranty (Commercial) <sup>5</sup>	All other components	1 year in the US and Canada	

#### $XX-XX\ indicates\ placeholder\ numbers,\ which\ vary\ depending\ on\ finish\ options,\ where\ the\ fan\ is\ installed,\ and\ other\ factors.$

#### **Accessories**

#### **Handheld Remote Optional Haiku Wall Control**





#### **Optional Light Kit**



#### Airfoil Finish



Polished Aluminum

Sensors	
Environmental sensors	Ambient temperature, surface temperature and relative humidity
Motion	Passive infrared
Communication radio	Embedded Wi-Fi chip













<sup>&</sup>lt;sup>2</sup> The actual, precise fan weight will vary based on individual component weights and finishing.
<sup>3</sup> SenseME Technology is supported by Android™ and iOS˚. All specifications are subject to change without notice.

Certified by Intertek/ETL to UL 507 damp rated applications

Warranties vary by country. See full warranty for details.

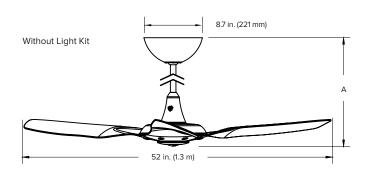

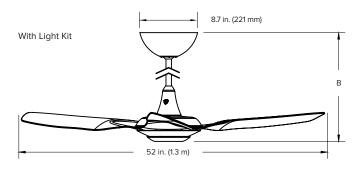

Technical Specification	ns		
Model	H Series Bamboo Universal Mount		
Model number <sup>1</sup>	S3127-X2-XX-XX-02-C-01		
Fan diameter		52 in. (1.3 m)	
Extension tube length <sup>2</sup>	7 in. (178 mm)	20 in. (508 mm)	32 in. (813 mm)
Fan height without light (A)	16 in. (406 mm)	29 in. (737 mm)	41 in. (1041 mm)
Fan height with light (B)	16.5 in. (419 mm)	29.5 in. (749 mm)	41.5 in. (1054 mm)
Hanging weight <sup>3</sup>		13 lb (5.9 kg)	
Motor and assembly finishes		, black, satin nickel, oil-ı ck, satin nickel, oil-rubb	
Airfoil material		Bamboo	
Airfoil finishes	Caramel or Cocoa		
Number of airfoils	3		
Motor type	EC motor with digital inverter drive		
Fan speeds	7		
Operating voltage and	100-125 VAC, 1 Ф, 50-60 Hz		
frequency	200-240 VAC, 1 Φ, 50-60 Hz		
IP rating	X2		
RPM (min/max)	49/201 RPM		
Amps (min/max)	0.048/0.27 A		
Watts (min/max)	2.41/31.94 W		
<b>Controller</b> ⁴	Haiku Home app; handheld remote supplied		
Optional light kit	16 dimmable light settings		
Operational temperature range	32° to 104° F (0° to 40° C)		
Environment		For indoor use only	
Marrants (Danidanti-115	Motor	Limited lifetime in t	he US and Canada
Warranty (Residential)⁵	All other components	1 year in the U	S and Canada
	Motor 2 years in the US and Canada		JS and Canada
Warranty (Commercial) <sup>5</sup>			

### XX-XX indicates placeholder numbers, which vary depending on finish options, where the fan is installed, and other factors. Extended length extension tubes are available in 48 in. (1219 mm) and 60 in. (1524 mm) and are packaged separately. For taller ceilings, a Tall Ceiling Kit is also available.

The actual, precise fan weight will vary based on individual component weights and finishing.

<sup>4</sup> SenseME Technology is supported by Android™ and iOS<sup>\*</sup>. All specifications are subject to change without notice. <sup>5</sup> Warranties vary by country. See full warranty for details.

#### **Accessories**

#### **Handheld Remote** Optional Haiku Wall Control





#### **Optional Light Kit**



#### Airfoil Finishes





Caramel Bamboo

Cocoa Bamboo

Sensors	
Environmental sensors	Ambient temperature, surface temperature and relative humidity
Motion	Passive infrared
Communication radio	Embedded Wi-Fi chip













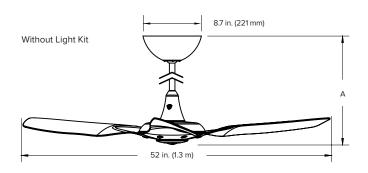

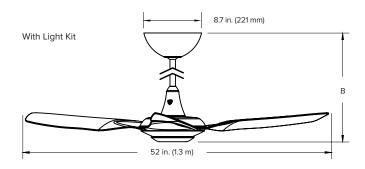

Technical Specification	าร		
Model	H Series Aluminum Universal Mount		
Model number <sup>1</sup>	S3 <sup>2</sup>	127-X2-XX-XX-02-C-01-F4	121
Fan diameter		52 in. (1.3 m)	
Extension tube length <sup>2</sup>	7 in. (178 mm)	20 in. (508 mm)	32 in. (813 mm)
Fan height without light (A)	16 in. (406 mm)	29 in. (737 mm)	41 in. (1041 mm)
Fan height with light (B)	16.5 in. (419 mm)	29.5 in. (749 mm)	41.5 in. (1054 mm)
Hanging weight <sup>3</sup>		15.5 lb (7 kg)	
Motor and assembly finishes		Black or white	
Airfoil material		Aluminum	
Airfoil finishes	Polished aluminum		
Number of airfoils	3		
Motor type	EC motor with digital inverter drive		
Fan speeds	7		
Operating voltage and	100–125 VAC, 1 Ф, 50–60 Hz		
frequency	200–240 VAC, 1 Ф, 50–60 Hz		
IP rating	X2		
RPM (min/max)	49/201 RPM		
Amps (min/max)	0.04/0.185 A		
Watts (min/max)	2.36/21.42 W		
<b>Controller</b> ⁴	Haiku Home app; handheld remote supplied		
Optional light kit	16 dimmable light settings		
Operational temperature range	32° to 104° F (0° to 40° C)		
Environment⁵	For indoor or covered outdoor use		
M	Motor	Limited lifetime in t	he US and Canada
Warranty (Residential) <sup>6</sup>	All other components	1 year in the U	S and Canada
Mayranty (Camanage : - 116	Motor	2 years in the l	JS and Canada
Warranty (Commercial) <sup>6</sup>	All other components	1 year in the U	S and Canada

### XX-XX indicates placeholder numbers, which vary depending on finish options, where the fan is installed, and other factors. Extended length extension tubes are available in 48 in. (1219 mm) and 60 in. (1524 mm) and are packaged separately. For taller ceilings, a Tall Ceiling Kit is also available.

<sup>3</sup> The actual, precise fan weight will vary based on individual component weights and finishing.

<sup>5</sup> Certified by Intertek/ETL to UL 507 damp rated applications

### <sup>6</sup> Warranties vary by country. See full warranty for details.

#### **Accessories**

#### Handheld Remote Optional Haiku Wall Control





#### **Optional Light Kit**



### Airfoil Finish



Polished Aluminum

Sensors		
Environmental sensors	Ambient temperature, surface temperature and	
	relative humidity	
Motion	Passive infrared	
Communication radio	Embedded Wi-Fi chip	












<sup>&</sup>lt;sup>4</sup> SenseME Technology is supported by Android™ and iOS°. All specifications are subject to change without notice.

# Haiku Light Kit | TECHNICAL SPECIFICATIONS



Technical Specifications	
Operating voltage	12/24 VDC
Operating current	1.5 Adc (100% PWM)
Nominal input power	16.3 W
Operating temperature	32° to 104° F (0° to 40° C)
Lens diameter	5.7 in. (145 mm)
Nominal lumen output	1280 Lm
CRI	82
Corresponding color temperature	2700 K
Dimming range	3–100%
Operating life expectancy	50,000 hours
Lens color	Diffused clear and smoky options included
Controller	On/Off control Digital dimmer
Warranty*	1 year in the US and Canada

<sup>\*</sup>Warranties vary by country. See full warranty for details.



