

HAIKU COASTAL

The world's first and only wet-rated, salt-resistant, and storm-ready outdoor ceiling fan, Haiku Coastal delivers superior performance and uncompromising durability in the saltiest, windiest, warmest, wettest, and wildest environments on earth. The end result? A product and promise no other fan company can make: A nearly unbreakable piece of art that performs like a beast from the sea no matter what Mother Nature has in store.



KEY FEATURES

- ▶ **Three ultra-durable, fade-resistant** hybrid resin airfoils
- ▶ **Airfoil retention system and fan stabilizer** to prevent damage and wobble in high winds
- ▶ **Handheld remote control and optional mobile app** with seven speed settings for unmatched convenience and comfort
- ▶ **Sealed electronics and canopy** with corrosion-resistant stainless steel hardware
- ▶ **Industry-leading 3-year warranty** with salt exposure coverage
- ▶ **Superior durability** that survived 163 MPH wind test, salt exposure test, dust test, and water spray test

DIAMETER

52 INCHES
(132 CM)

MOUNTING

UNIVERSAL

CONTROL

- IR REMOTE - MOBILE APP - 0-10 V
- BLUETOOTH WALL CONTROL
- VOICE INTEGRATION

WARRANTY

3 YEARS



PHYLUX

ENQUIRY@HAIKU.COM.SG
+65 6848 8500
HAIKU.COM.SG

160 Paya Lebar Rd,
#01-08 Orion,
Singapore 409022

HAIKU COASTAL

THE WORLD'S FIRST AND ONLY STORM-READY FAN

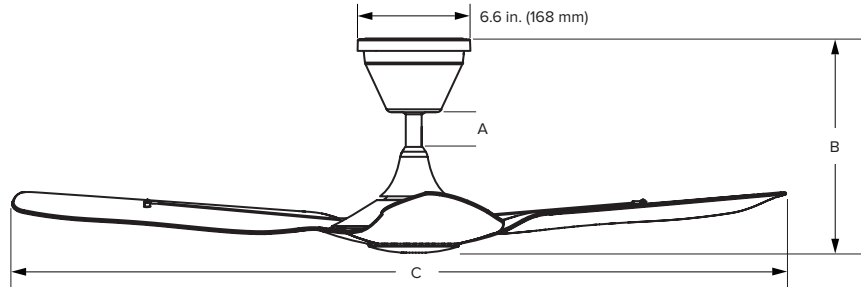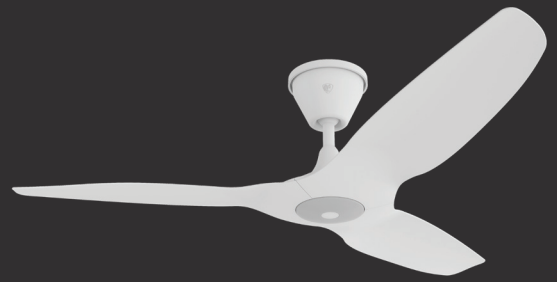

Pictured with 5 in. (128.5 mm) downrod¹

Downrod Lengths						
Downrod (A) ¹	Included (52-in. fans)	Included (60-in. fans)	Optional			
		5 in. (128.5 mm)	10 in. (256 mm)	22 in. (561 mm)	34.8 in. (884 mm)	50.8 in. (1291 mm)
Fan Height (B)	11.5 in. (289 mm)	16.4 in. (417 mm)	28.4 in. (721 mm)	41.1 in. (1044 mm)	57.1 in. (1451 mm)	69 in. (1755 mm)
Ceiling Height	≥ 8 ft (≥ 2.4 m)	≥ 9 ft (≥ 2.7m)	≥ 10 ft (≥ 3 m)	≥ 11 ft (≥ 3.4 m)	≥ 12 ft (≥ 3.7 m)	≥ 13 ft (≥ 4 m)

Fan Specifications									
Diameter (C)	CFM (Max)	Max Speed	Watts (Max)	Environment ²	Input Power	Packaged Dimensions and Weight	Fan Weight	Mounting	Sound Level ³
52 in. (132 cm)	6,429 CFM	202 RPM	26.7 W	UL Wet Rated for outdoor use IP56	100–240 VAC, 50/60 Hz, 1 Φ	27-3/8 in. L x 11-1/8 in. W x 9-3/8 in. H (695 mm L x 283 mm W x 238 mm H) 17.4 lb (7.9 kg)	10.4 lb (4.7 kg)	Flat ceilings 8 ft (2.4 m) or taller	<35 dBA at max speed
60 in. (152 cm)	9,982 CFM	200 RPM	35.7 W			31-1/4 in. L x 11-1/8 in. W x 9-1/2 in. H (794 mm L x 283 mm W x 241 mm H) 19 lb (8.6 kg)	12.9 lb (5.9 kg)	Flat ceilings 9 ft (2.7 m) or taller	

Construction Features					Integrated LED Light (Optional)		
Airfoils	Motor	Controls	Mounting	Optional Accessories	Color Temp	CRI	Features
UV-resistant hybrid resin construction Stainless steel retention cables secure and stabilize airfoils	High-efficiency brushless EC motor Sealed bearings and electronics	Handheld remote Bluetooth wall control Big Ass Fans mobile app ⁴ Voice control ⁴ 0–10 V	Covered mounting bracket protects against debris and moisture Fan stabilizer restricts movement in high wind conditions	Bluetooth wall control 0–10 V module Extended length downrods	2700 K	90	Sealed for protection against moisture Settings include on/off and 16 dimmable light levels

Ordering Information	
Matte Black	Matte White
MK-HKC1-042506A258F258I05S2	MK-HKC1-042506A824F824I05S2

Finish Options



Remote



Lead times may vary. See full warranty for coverage information.

¹ Optional downrod lengths packaged separately. Lengths in inches are rounded to the nearest whole number.
² Wet-rated fans installed in exposed outdoor locations must have fixed/permanent coverage above the fan wiring cover. The included fan stabilizer must be installed. Suitable for salt air environments.
³ Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.
⁴ Requires a Wi-Fi network. Voice control requires an Amazon Alexa-enabled device or the Google Assistant.